

Gearbox Prognostics Simulator (GPS)

Innovative Gearbox
Prognostics Research
Tool




8201 Hermitage Road, Richmond, VA 23228 U.S.A.
TEL +1-804-261-3300/FAX +1-804-261-3303
www.spectraquest.com

Gearbox Prognostics Simulator

- ❖ Simulate industrial gearbox for diagnostics and prognostics research
- ❖ Consists of two-stage parallel shaft test gearbox with rolling or sleeve bearings
- ❖ Can be configured with a gear ratio from 1 to 6
- ❖ Can be submitted to a torque large enough to induce wear and damage in the gears
- ❖ Designed to maximize the number of gearbox configurations to investigate gearbox dynamics and acoustic behavior, health monitoring, and vibration based diagnostic and prognostics techniques
- ❖ Robust enough to handle heavy loads and spacious enough for easy gear placement, setup, and installation of monitoring devices.

Gearbox Prognostics Simulator

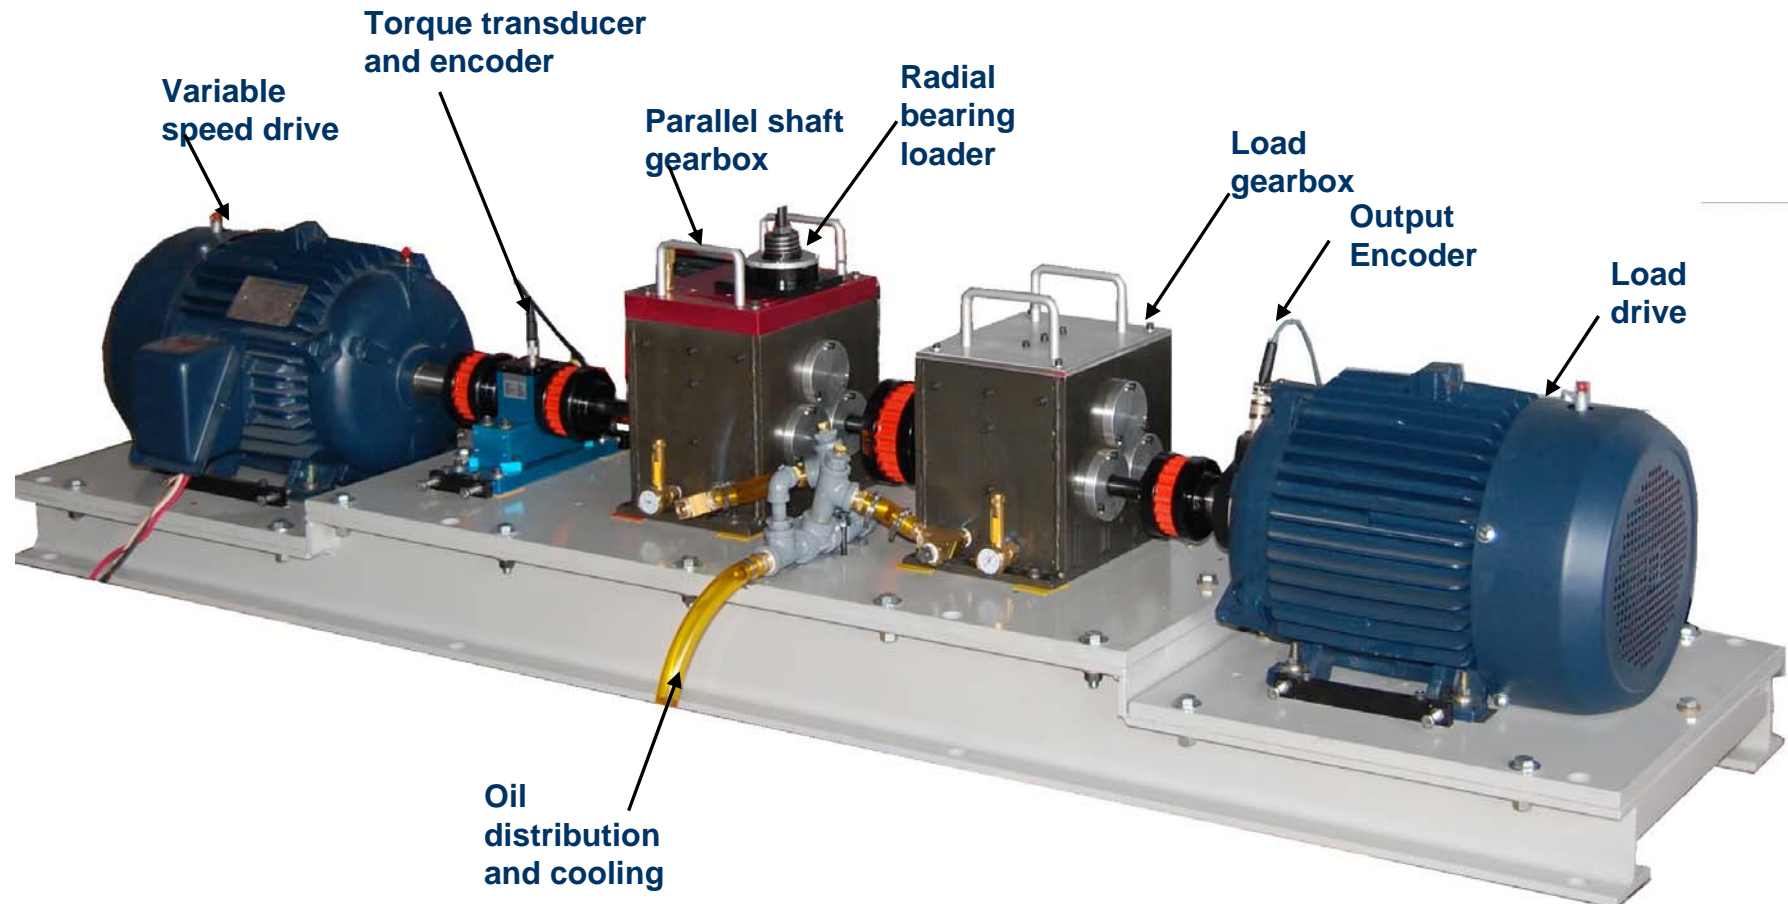

GPS Benefits

- ❖ Faults like surface wear, crack tooth, chipped tooth and missing tooth can be demonstrated and induced on either spur gears or helical gears.
- ❖ Rolling element bearing faults like inner race, outer race, and ball damage can also be incorporated.
- ❖ Adjustable clearance to study backlash is possible: increasing the amount of backlash is without major consequence, and reducing backlash can result in binding and/or excessive operating temperatures.
- ❖ Gearbox misalignment can also be introduced intentionally in the GPS.
- ❖ Any of these faults can be added to the gearbox one at a time, or simultaneously to study fault interactions.

GPS Benefits

- ❖ Both torsional and radial loadings can be applied to study damage signature or propagation in gears and/or bearing
 - ❖ Torsional load is applied via a 10 HP variable frequency AC drive with a programmable, user-defined speed profiles
 - ❖ Radial load is applied to a shaft in the parallel gearbox
- ❖ With the programmable load drive, load fluctuations can be applied to simulate real life loading conditions.

GPS Features

- ❖ One 2-stage oil-lubricated parallel shaft test gearbox up to 6.25 ratio.
- ❖ Torsional and radial variable speed loading.
- ❖ Gears can slide along the parallel shafts to alter system stiffness and make room for additional devices.
- ❖ Parallel shaft gearbox adaptable to spur or helical gears and to rolling element bearings or sleeve bearings.
- ❖ Intentionally damaged or worn gearing can be fitted to study the effects on vibration signature.
- ❖ Alterable backlash by replacing bearing mounting hubs to provide the desired clearance.
- ❖ Modular design makes the introduction of faulted bearing and/or faulted gears an easy task.
- ❖ Multiple mounting locations provided for installation of various transducers.
- ❖ Develop diagnosis and prognosis techniques and advanced signal processing methods.

Transducers and DAQ

- ❖ Designed to accommodate different types of sensors easily.
- ❖ Accelerometers can be installed on the bearing housing to measure the vibrations in all three directions.
- ❖ Torque meter enables precise load measurement.
- ❖ Input and output shafts can be fitted with encoder or tachometer to measure the transmission error or for time synchronize averaging.
- ❖ Other transducers can also be installed as per customers request.
- ❖ Data acquisition hardware and software are also available from SpectraQuest and ready to do time domain and frequency domain signal analysis.

Option Kits

- ❖ Gearbox bearing fault kit
- ❖ Defective spur gears
- ❖ Helical gears set
- ❖ Defective helical gears
- ❖ Eccentric spur gear
- ❖ Gearbox oil-impregnated sleeve bearing
- ❖ PC motor and load control kit

Specifications

Mechanical

Shaft Diameter	1" diameter; Turned, Ground, & Polished (TGP) steel
Test Gearbox	2-stage, 2.5 maximum ratio per stage (6.25 max), spur or helical gears
Test Gearbox Bearing	Deep groove ball bearing or oil-impregnated bronze sleeve bearing
Test Bearing Loader	3000lb capacity with force transducer
Load Gearbox	2-stage, 2.5 maximum ratio per stage (6.25 max), spur gears Deep groove ball bearing
Torque meter	Up to 100N.m with built-in 360 pulse encoder
Output shaft encoder	360 pulse per turn encoder
Alignment	Jack bolts on gearboxes and motors for horizontal alignment and standard shims for vertical alignment
Oil Distribution	0.9gpm capacity distribution and cooling oil system driven by 1/3HP motor
Foundation	5/8" steel plates on 4"x6" steel beams

Specifications

Electrical

Motor	3 Phase, 10 HP motor
Load	3 Phase, 10 HP motor
Drive	10 HP variable frequency, common bus AC drive system with multi-featured front panel programmable controller
RPM range	0 to 3600 rpm variable speed
Voltage	230 VAC, Three phase, 60/50 Hz

Physical

Weight	Approximately 1800lb (820kg)
Dimensions	L=96" (245cm), W=22" (56cm), H=22" (56cm) test rig L=30" (76cm), W=16" (41cm), H=26" (66cm) oil distribution D=17" (43cm), W=36" (91cm), H=60" (152cm) motor drive